

DATA SHEET PROBE TYPE HEAT DETECTOR WITH EXPLOSION PROOF JUNCTION BOX (110-140)°C

PART: IH042-M-*(110-140)°C-JAX

DOC.NO: DP-5.8/MT-743

DATE: JUNE. 2024

REVISION:00

SCALE: N.T.S


SHEET: 1 OF 2

APPD. BY :DB


INTRODUCTION:-

PROBE TYPE FIXED TEMPERATURE HEAT DETECTOR IS USED IN SPECIAL APPLICATIONS. EXPLOSION PROOF JUNCTION BOX IS USED WHEREVER APPLICABLE.

NOTE A:- THIS DATA SHEET CAN BE ALSO REFERRED AS DOC. NO.:DP-5.8/CP-743

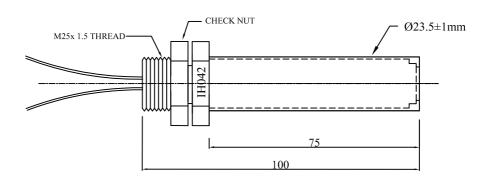

FIXING ARRANGEMENT:

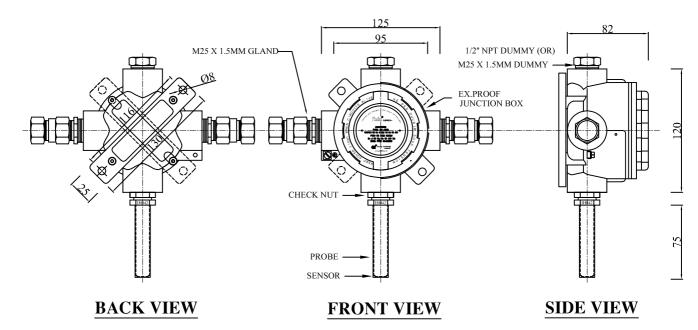

NOTE B:

- 1. ALL DIMENSIONS ARE IN "mm" UNLESS OTHERWISE SPECIFIED.
- 2. TOLERANCE ON DIMENSION \pm 3 mm, UNLESS OTHERWISE SPECIFIED.
- 3. THIS MODEL TO BE USED ONLY FOR OUTDOOR APPLICATIONS.
- 4. *: TEMPERATURE SET POINT TO BE CONFIRMED DURING ORDER PLACEMENT

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.



ISO 9001 - 2015 CERTIFIED COMPANY

NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR, KODAMBAKKAM, CHENNAI-600 024, INDIA.

PHONE: +91 44 2481 2420,

E-MAIL :engineering@agnicontrols.com WEBSITE : www.balafire.com



DATA SHEET

PROBE TYPE HEAT DETECTOR WITH EXPLOSION PROOF JUNCTION BOX (110-140)°C

PART: IH042-M-*(110-140)°C-JAX

DOC.NO: DP-5.8/MT-743


DATE:JUNE. 2024

REVISION:00

SCALE: N.T.S

SHEET: 2 OF 2

APPD. BY :DB



POT. FREE
"NO" CONTACT
(WHEN DEVICE
OPERATES "NO"
4 BECOME "NC")


1 3 5


S.NO	PART NO*	DESCRIPTION	
01.	IH042-M- 110°C-JAX-NO	110°C, NORMALLY OPEN	
02.	IH042-M- 120°C-JAX-NO	120°C, NORMALLY OPEN	
03.	IH042-M- 130°C-JAX-NO	130°C, NORMALLY OPEN	
04.	IH042-M- 140°C-JAX-NO	140°C, NORMALLY OPEN	

TYPE - I

EQUIVALENT CIRCUIT FIG. 1

TYPE - II EQUIVALENT CIRCUIT FOR WIRE CONVENTIONAL SYSTEM FIG. 2

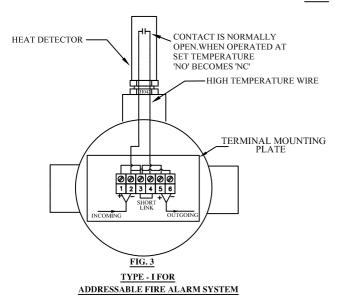

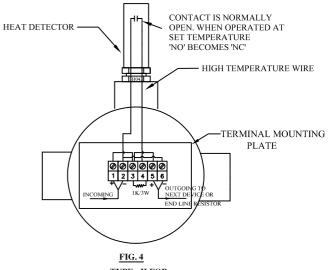

TYPE - II FOR
CONVENTIONAL 2 WIRE FIRE ALARM SYSTEM

NOTE C:

- 1. HEAT DETECTOR IS CONNECTED WITH SHORT LINK.
- 2. ONE <u>SHORT LINK</u> AND ONE <u>RESISTOR LINK</u> ARE PROVIDED AS SPARE / ACCESSORIES.
- 3. USE ANY ONE LINK AS PER REQUIREMENT

TECHNICAL SPECIFICATION

HEAT DETECTOR PART NO: IH042-M-*(110-140°C)-JAX-P1			JUNCTION BOX PART NO: IH042-M-*(110-140°C)-JAX-P2		
01.	MAKE	AGNI CONTROLS	01.	ENCLOSURE MAKE	LIMATHERM EU
02.	TEMPERATURE SETTING	110°/120°/130°/140°C	02.	ENCLOSURE MODEL NO	XD-JB85
		(FIXED TEMPERATURE	03.	AREA CLASSIFICATION	ZONE 1, 2, 21 & 22
03. 04. 05.	TYPE OF SENSING ELEMENT PROBE BODY TOLERANCE	ANY ONE SETTING ONLY) BI-METAL FIXED TEMPERATURE AUTO RESET TYPE ALUMINIUM ± 7%	04. 05.	HAZARDOUS AREA PROTECTION DETAILS CERTIFICATION FOR ENCLOSURE	(♣) Il 2G Ex db IIC Gb (♣) Il 2D Ex tb IIIC Db (♣) ATEX APPROVAL FOR ENCLOSURE. CERTIFICATION NUMBER: FTZU 05 ATEX 0262U
06.	CURRENT RATING	230V AC - 2A, 110V AC - 5A, 125V DC - 0.5A, 48V DC - 1A, 24V DC - 2A	06.	CABLE ENTRY	FM APPROVAL FOR ENCLOSURE. ORIGINAL PROJECT ID:3042541. M25 X 1.5MM
07. 08.	MATERIAL PROTECTION	MACHINED/CASTING ALUMINIUM PART IP 67 (PROBE ASSEMBLY ONLY)	07.	ТҮРЕ	TO USE HAZARDOUS AREA.

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.

CK AGNI CONTROLS

ISO 9001 - 2015 CERTIFIED COMPANY

NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR, KODAMBAKKAM, CHENNAI-600 024, INDIA.

PHONE: +91 44 2481 2420.

E-MAIL :engineering@agnicontrols.com WEBSITE : www.balafire.com