


DATA SHEET	1" NGT CO2 SLAVE CYLINDER VALVE				PART NO: B004/NPT
DP-5.8/11-383	DATE : MAR 2011	REVISION : 00	SCALE : N.T.S	SHEET : 1 OF 1	APPD. BY: DB

INTRODUCTION :-

CEODEUX CYLINDER VALVE FITTED IN THE CO2 CYLINDER CAN BE OPERATED THROUGH PNEUMATIC PRESSURE HEAD WHICH IS AN INTEGRAL PART OF VALVE AND ALSO CAN BE OPERATED BY USING MANUAL LEVER.

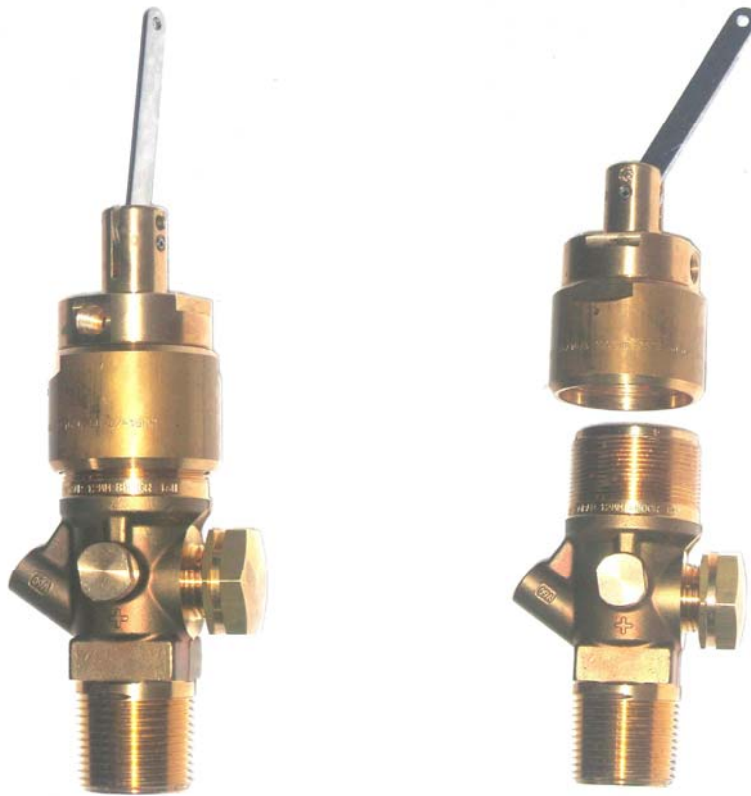

TECHNICAL SPECIFICATION

01	VALVE:		02	PNEUMATIC ACTUATOR:	
1.1	WORKING PRESSURE MAX.	250 BAR	2.1	CONNECTION	B=M42 X 1.5
1.2	TEMPERATURE RANGE	-20°C TO +60°C	2.2	PNEUMATIC CONNECTION	E=G 1/8"
1.3	SEAT ORIFICE SIZE	12 mm	2.3	WORKING PRESSURE MIN.	15 BAR
1.4	VALVE BODY	BRASS	03	MANUFACTURER	CEODUEX (EU)
1.5	INLET CONNECTION	C=1" NGT	04	APPROVAL	LPCB / VDS / CE
1.6	OUTLET CONNECTION	A=W 21, 8 X 1/14" DIN 477			
1.7	DIP TUBE CONNECTION	G=M16 X 1			

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.



AGNI CONTROLS CHENNAI
NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR,
KODAMBAKKAM, CHENNAI-600 024, INDIA.

PHONE : +91 44 2481 2420, FAX : +91 44 2481 2475,
E-MAIL : engineering@agnicontrols.com WEBSITE : www.balafire.com

**ISO 9001 - 2008
CERTIFIED BY
BUREAU VERITAS**