

DATA SHEET


HIGH PRESSURE DISCHARGE HOSE

PART NO:
BIH020 / BIH021

OLD DWG. NO:DP-5.8/08-034	DATE : APRIL 2012	REV.: 00	SCALE : N.T.S	SHEET : 1 OF 1	APPD. BY:D.B
NEW DWG. NO:DP-5.8/MT-238	DATE : JUNE 2013				

INTRODUCTION :-

HIGH PRESSURE WITH SS BRAIDING FLEXIBLE DISCHARGE HOSE IS FITTED BETWEEN CYLINDER VALVES AND NON RETURN VALVE IN MANIFOLD IN THE CO2 FIRE EXTINGUISHING SYSTEM.

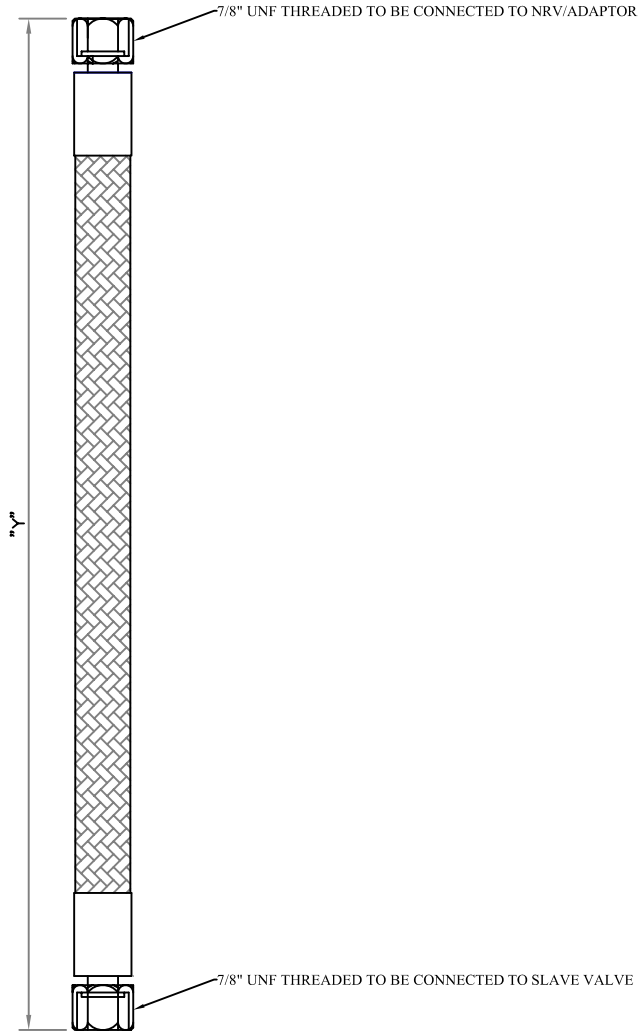

SL NO	PART NO**	LENGTH "Y"
1	BIH020	400 MM
2	BIH021	350 MM

ALL DIMENSIONS ARE IN "mm" UNLESS OTHERWISE SPECIFIED.

TECHNICAL SPECIFICATION

01. MAKE	AGNI CONTROLS	05. MAX. WORKING PRESSURE	4000 PSI (275 BAR)
02. CONSTRUCTION	OUTER WIRE BRAIDING OUT OF SS304	06. TEST PRESSURE	8000 PSI (550 BAR)
03. TEMPERATURE RANGE	-40°C TO +100°C	07. LENGTH	BASED ON REQUIREMENT
04. NOMINAL BORE	1/2"		

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.



NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR,
KODAMBAKKAM, CHENNAI-600 024, INDIA.

PHONE : +91 44 2481 2420, FAX : +91 44 2481 2475,
E-MAIL : engineering@agnicontrols.com WEBSITE : www.balafire.com

**ISO 9001 - 2008
CERTIFIED BY
BUREAU VERITAS**