

OLD DWG. NO: DP-5.8/12-477

DATE : FEB 2012

REV: 00


SCALE : N.T.S

SHEET : 1 OF 1

APPD. BY : B.S.K

INTRODUCTION:

PRESSURE SWITCH USED IN FIXED INSTALLATION FIRE SUPPRESSION SYSTEM TO PROVIDE GAS RELEASED INDICATION TO FIRE ALARM CONTROL PANEL

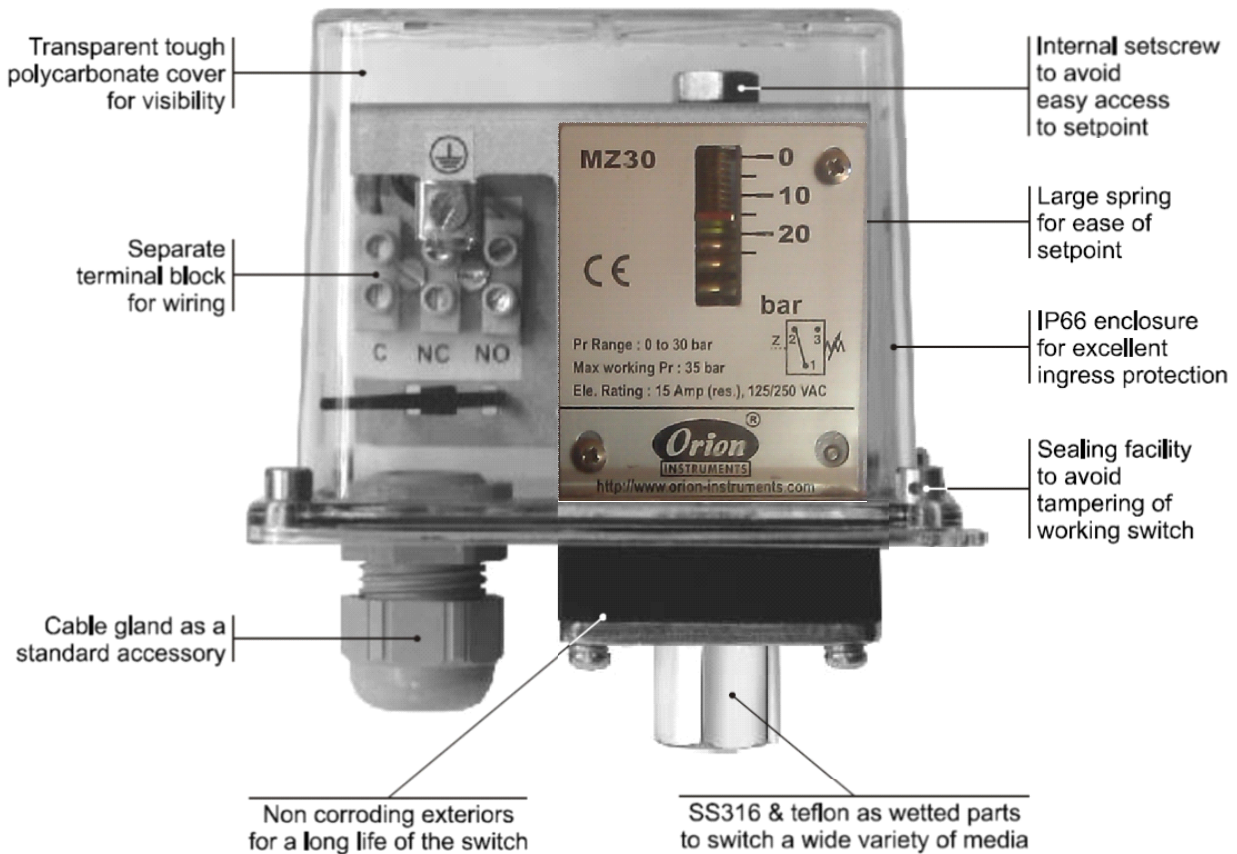

TECHNICAL SPECIFICATION

01.	MANUFACTURER	ORION	07.	ENCLOSURE	IP66 STANDARD, TRANSPARENT TOUGH POLYCARBONATE COVER
02.	MANUFACTURER MODEL NO	MZ-30	08.	CABLE GLAND	M20 X 1.5 STANDARD
03.	ADJUSTABLE RANGE	5 TO 25 BAR	09.	MAX. WORKING TEMP	80° C MAXIMUM
04.	WETTED PARTS	SS316 & TEFLON	10.	APPROXIMATE WEIGHT	0.600 Kg
05.	ELECTRICAL RATING	15A 250V AC, SPDT SNAPACTION MICRO SWITCH			
06.	PRESSURE PORT	1/4" BSPF STANDARD			

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.