

DATA SHEET

56 LITRE WATER CAPACITY CO CYLINDER

OLD PART NO :B128

B048-56

OLD REF NO :128

DATE : OCT-2009

REVISION : 00

SCALE : N.T.S


SHEET : 1 OF 1

APPD. BY :DB05

DP-5.8/08-002

INTRODUCTION :-

CO CYLINDER IS USED TO FILL 36 KG. OF CO₂ GAS TO PROTECT THE SPECIFIED AREA BY USING, DISTRIBUTION PIPING, DISCHARGE NOZZLE AND OTHER ACCERSSORIES

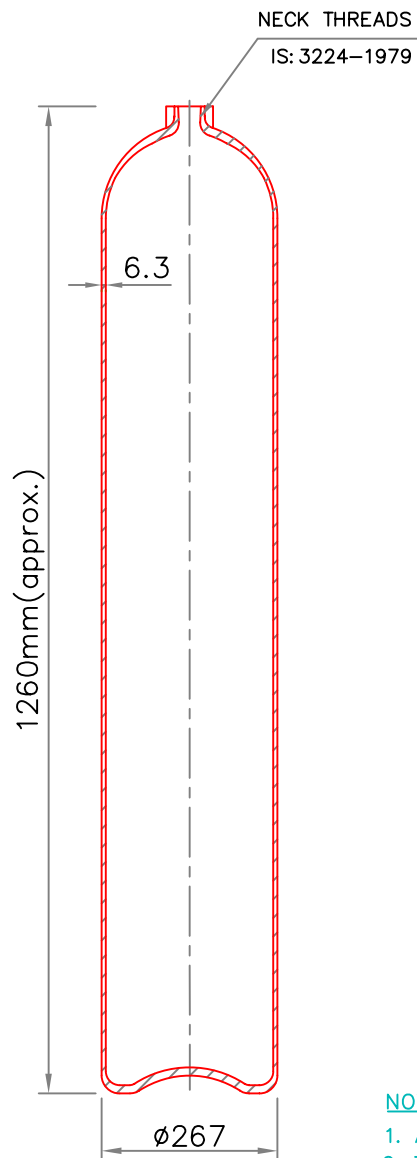

NOTE :

1. ALL DIMENSIONS ARE IN "mm" UNLESS OTHERWISE SPECIFIED.
2. TOLERANCE ON DIMENSION ± 3 mm, UNLESS OTHERWISE SPECIFIED.

TECHNICAL SPECIFICATION

01.	MANUFACTURER	EKC / MARUTI / EURO TCH	07.	TEST PRESSURE	250 Kg./Cm
02.	TYPE	HIGH PRESSURE, SEAMLESS RECHARGEABLE CO ₂ CYLINDER	08.	CHARGE WEIGHT	36 Kg.
03.	CODE OF MANUFACTURE	IS:7285 /1988	09.	WATER CAPACITY	56 Lits. WC
04.	FILLING RATIO	0.667 Kg./Lt.	10.	OUTSIDE DIAMETER	267mm
05.	METHOD OF MANUFACTURE	HOT SPINNING PROCESS	11.	LENGTH	1260mm(approx.)
06.	WORKING PRESSURE	150Kg./Cm at 45°c	12.	CYLINDER WALL THICKNESS	6.3mm
			13.	TARE WEIGHT	68 Kg(approx.)
			14.	APPROVAL	CCE, NAGPUR

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.



NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR,
KODAMBAKKAM, CHENNAI-600 024, INDIA.

PHONE : +91 44 2481 2420, FAX : +91 44 2481 2475,

E-MAIL : engineering@agnicontrols.com WEBSITE : www.balafire.com

**ISO 9001 - 2008
CERTIFIED BY
BUREAU VERITAS**