


DATA SHEET PROBE TYPE HEAT DETECTOR (150-230)°C

PART NO : IH042-P1H *(150-230)*C-SS

DOC.NO.:DP-5.8/MT-737 DATE:JUNE. 2024 REVISION:04 SCALE: N.T.S SHEET: 1 OF 1 APPD. BY: DBS

INTRODUCTION :-

PROBE TYPE FIXED TEMPERATURE HEAT DETECTOR IS USED IN SPECIAL APPLICATIONS. SUITABLE JUNCTION BOX (SS/ALUMINIUM) MAY BE USED AS PER APPLICATION.

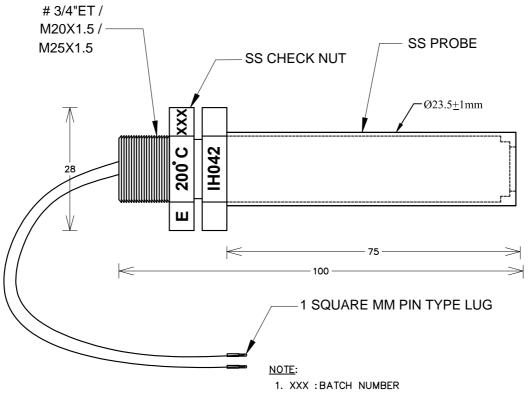

- 2. TOLERANCE ON DIMENSION: ± 3mm
- 3. XX:SENSOR IS TO BE PROTECTED FROM PHYSICAL DAMAGE PROTECTION COVER IS PROVIDED WITH DETECTOR. PROTECTION COVER SHOULD BE REMOVED ONLY DURING COMMISSIONING.
- 4. ALL DIMENSIONS ARE IN mm
- *:TEMPERATURE SET POINT TO BE CONFIRMED DURING ORDER PLACEMENT.
- 6. #: THREAD SIZE TO BE CONFIRMED DURING ORDER PLACEMENT.

TECHNICAL SPECIFICATION

| 01. | MAKE | AGNI CONTROLS | 07. | IP PROTECTION | IP 67 |
|-----|-------------------------|---|-----|--------------------|----------------------------|
| 02. | TEMPERATURE SETTING | 150°/160°/170°/180°/190°/ 200°/210°/220°/230°C/* | 08. | ADAPTOR CONNECTION | 3/4"ET / M20X1.5 / M25X1.5 |
| | | (*-CUSTOMER SPECIFICATION) | 09. | OPERATION | NORMALLY "NO". WHEN SET |
| 03. | TYPE OF SENSING ELEMENT | BI-METAL FIXED TEMPERATURE | | | TEMPERATURE REACHES "NO" |
| 04. | TOLERANCE | ± 7% | | | BECOMES "NC". |
| 05. | CURRENT RATING | 240V AC - 10A, 110V AC - 10A, | 10. | SEALING | HERMATICALLY SEALED. |
| | | 250V DC - 2.5A, 24V DC - 7A, | | | |
| 06. | PROBE BODY | SS | | | |

IMPORTANT:

AGNI CONTROLS RESERVES THE RIGHT TO CHANGE OR MODIFY WITHOUT PREVIOUS NOTICE ANY DATA OR SPECIFICATION DUE TO CHANGES OR MODIFICATION IN ORDER TO IMPROVE THE PRODUCTS / SYSTEM PRESENTED.

CK AGNI CONTROLS

ISO 9001 - 2015 CERTIFIED COMPANY

NO.1, 6TH STREET, Dr.SUBBARAYAN NAGAR, KODAMBAKKAM, CHENNAI-600 024, INDIA.

PHONE: +91 44 2481 2420,

 $E-MAIL: engineering @agnicontrols.com \ WEBSITE: www.balafire.com\\$